



TECHNICAL SHEET


Programmable RF receiver with 1 output (NO/NC)



ABK-400-1-12

- Power: 12V DC
- Output contacts: NO/NC/COM
- Capacity for 29 remote controls
- Transmission distance: 50 meters (open area)
- Weight: 0.09 kg
- Size: 60 x 42 x 28 mm

Wiring Diagram

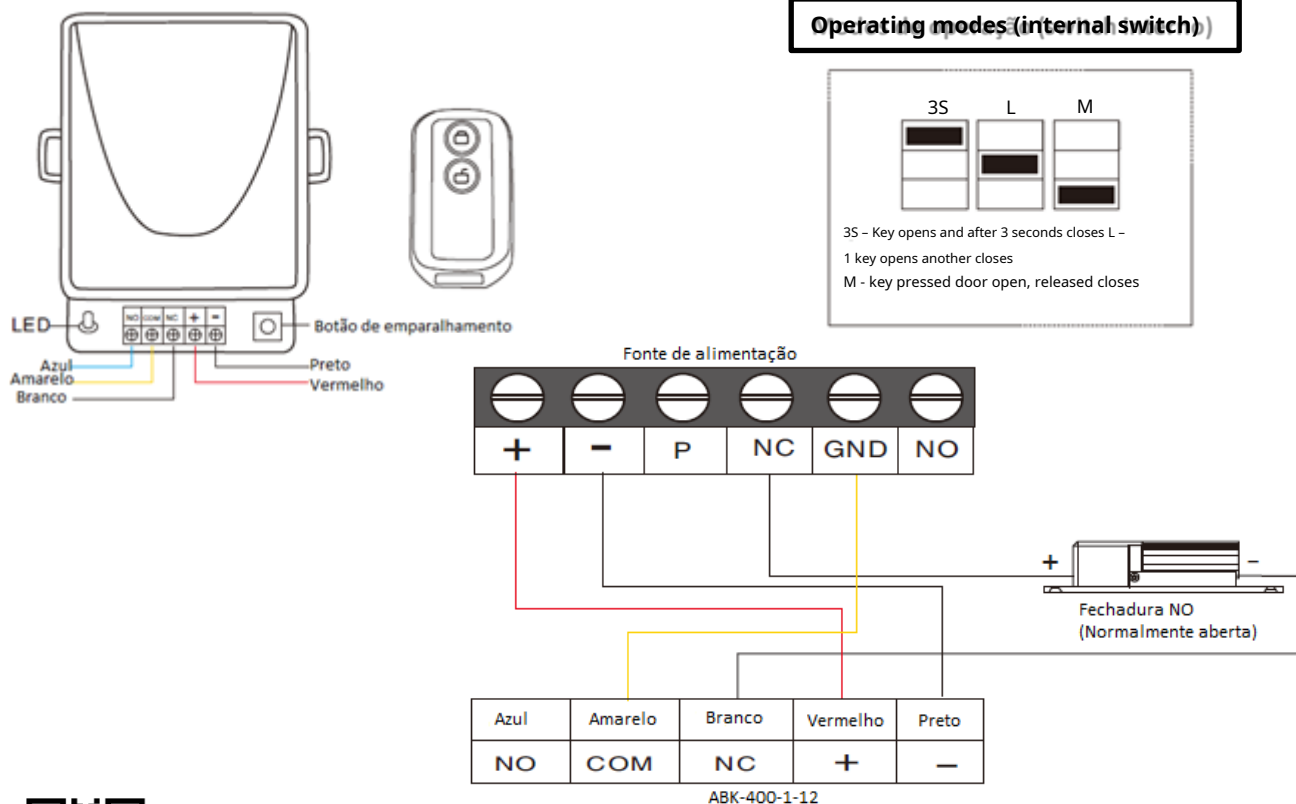



Pairing Remote Controls

You can join up to a maximum of **29 issuers** for the same controller. The steps to incorporate an emitter into the controller are as follows:

Press the connection button (When the button is pressed the indicator LED lights up)

Then press one of the transmitter's keys (After this, the indicator LED will flash 5 times in a row). Now the transmitter is recognized by the controller.

Delete Remote Commands

The system **does not allow** cancel transmitters independently, all transmitters are canceled at the same time. To do this, simply press the connect button and hold it for 8 seconds.

