

TECHNICAL SHEET


Embedded RF Card Terminal



RF-ZL2

- Power supply: 12V DC
- Reading distance: 2~3 cm
- Allowed operating temperature: -30 °C to 50 °C
- Card type: In 125KHz
- Water-proof
- With led light
- Weight: 0,02Kg
- Diameter: 26 mm
- Size: 22 x 20 mm

Dimensions

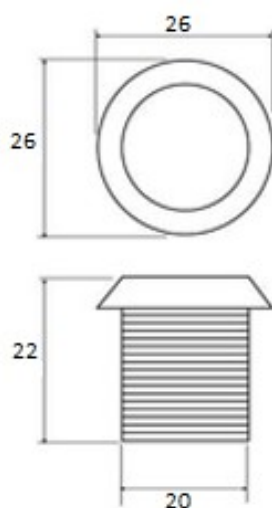

Units: mm





Triplow

