

INSTRUCTIONS FOR ELECTRIC LOCKS 2087



Features:

304 Stainless Steel

Automatic door opening by remote control

Available in versions: No chain, door a(b2e0r8 ta7 PCOP) theu No current, p orta closed a (2087 POOP)


Reversible. For right or left-hand doors. Continuous service without heating and safe inauçtãilioz Power supply: 12VDC +/- 10%

Working: 12 VDC 140 mA para Model P COP and 170 m a Model P.

Consumption: 2W

Working temperature: -40°C~+50°C.

Dimensions

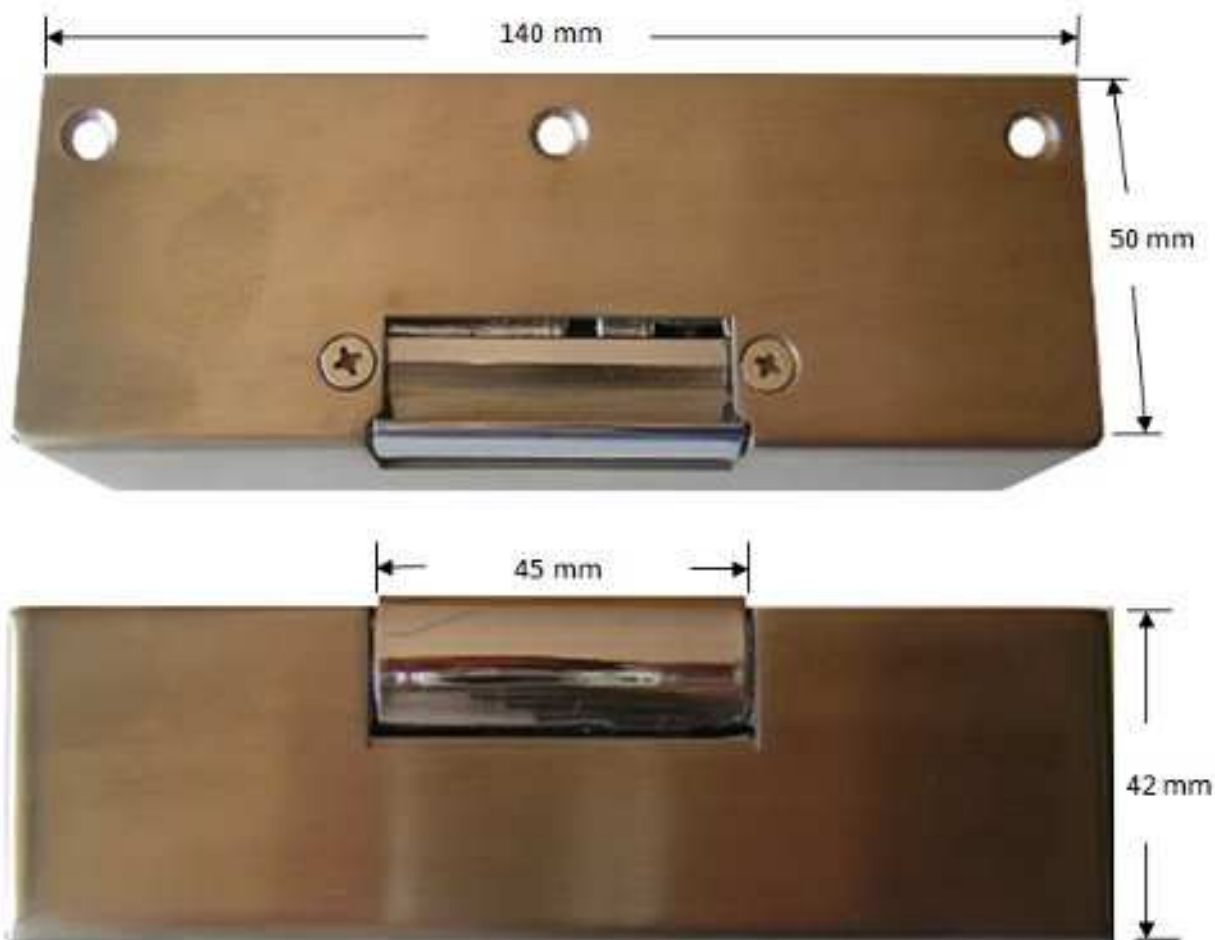

For this equipment to work properly, the latch's tilting mechanism must be kept permanently lubricated with vaselínquínuida or spray.

Ordering details and
Electric latch 2087 with working voltage at 12CVD
Reversible

In the version:

No chain, door open ta (2087PCO) No P
chain, door closed ada (2087POOP)