



Triplow






V600-BT TECHNICAL DATA SHEET



Specifications

Model	V 600-BT
Material	Metal
Card type	125 KHz (RFID)
LED indication	Blue and red
Beep Sound	Yes
Battery	4x1.5V AAA batteries(not included)
Low voltage warning	<4.5 V
Alternative opening	Mechanical key
Dimensions (H x W)	250 x 55 x 15 mm

Dimensions

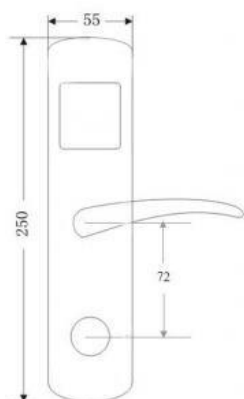




Triplow W

V600-BT




Assembly

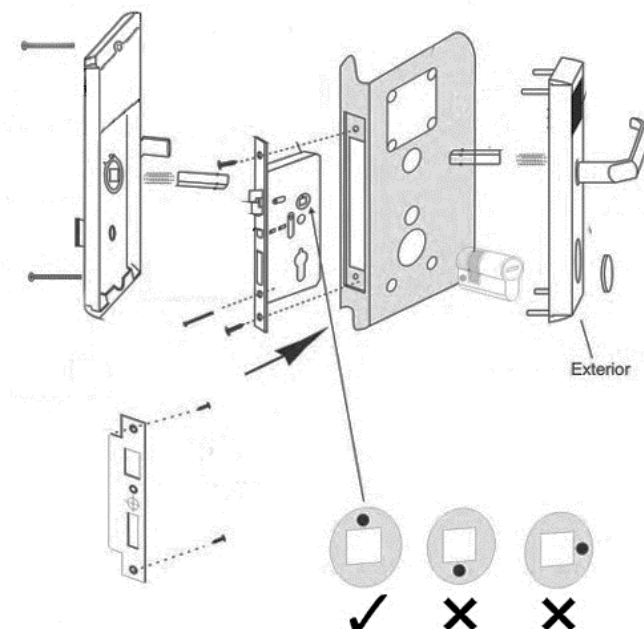

THE

After placing the lock case in the door fitting, remove the lock faceplate and screw the cylinder in place with the screw provided.

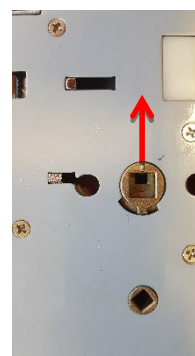

B

The court fitting must have the arrow aligned and pointing as shown in the image.



W

Inside each handle insert the springs to fix the blocks in the correct position.



Schedule

- **Reset to factory settings (RESET)**

BEFORE installing the lock, it is necessary to manually reset it. To reset: turn on the lock (insert batteries), connect all components, and press the RESET button for approximately 5 seconds until the lock beeps twice. The initialization process is complete, and the factory settings have been restored.

- **Pairing with TTLOCK APP**

To pair the lock with the TTLOCK application, you need to wake it up by swiping a card on the reader, then follow the pairing instructions in the TTLOCK Manual.