




# TWB01

## Automatic draught excluders

Data Sheet  
Installation Guide

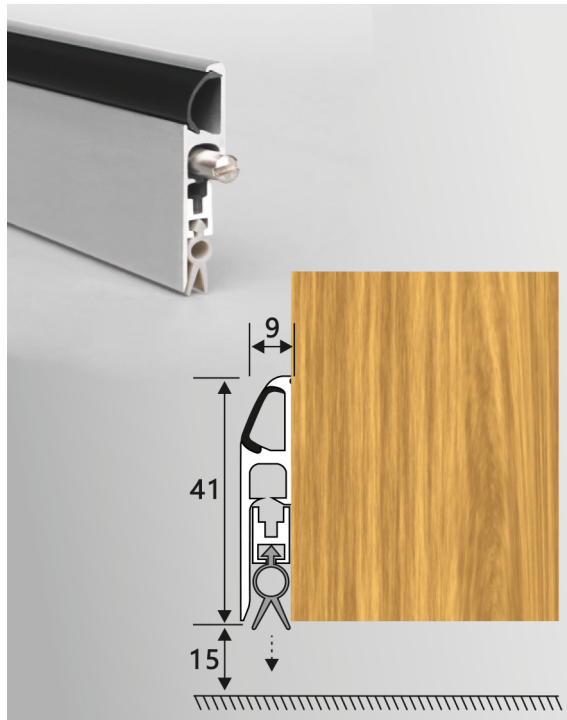


Drop Seals are suitable for restoration projects such as installed doors that need to increase acoustic, thermal insulation and dust protection.



## Technical Specifications


APPLICATION	Single or double hinged doors
LENGTH	from 700 to 1000 mm
GAP HEIGHT (max)	15 mm
FINISH	Anonized Aluminium
FIXING	Surface mounted hidden screws
SEAL	Grey silicone rubber
ACCESSORIES	Fixing screws, protection covers and plunger
ADJUSTABLE LENGTH	Through cut - up to 10 cm
AVAILABLE MODELS	TWB01-700 ; TWB01-800; TWB01-900; TWB01-1000

**Thank you for buying our product!**

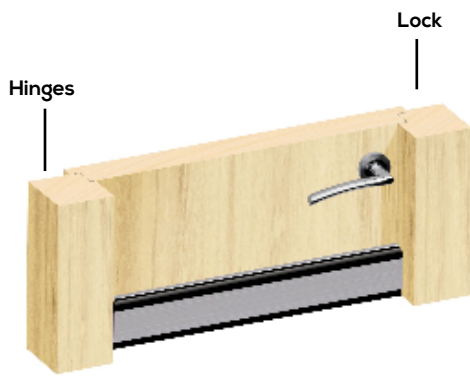

### Step 1:

- The sealing profile must be fixed on the outer side of the door and is surface mounted. The only modification needed is to drill holes for the fixing screws;

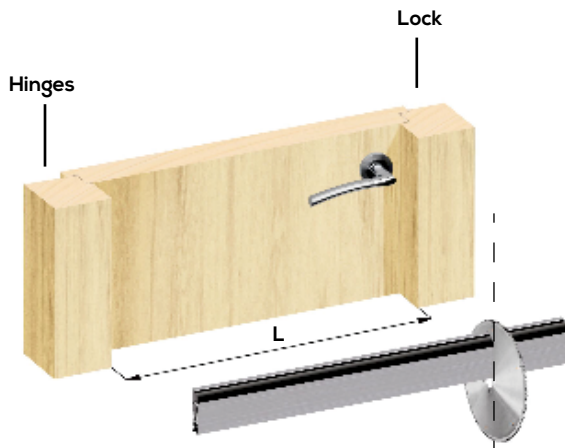


### Step 2:

- Measure door length and subtract 4 mm ( $L - 4 \text{ mm}$ );
- Cut the profile to size, ensuring that the cut is made on the side of the lock and not on the side with the hinges;




### Step 3:

- Remove black rubber. Adjust and fit the protection covers on the lock's side, securing the cover with the sealing profile;

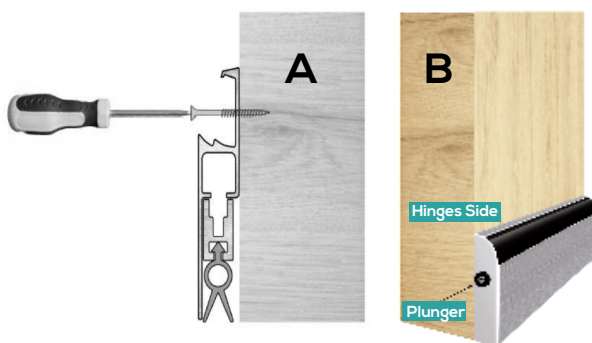

### Step 4:

- Align the bottom part of the profile with the door and secure with the fixing screws (diagram A);
- Reinstall the black rubber (diagram B);
- Place the plunger at the side of the profile with the hinges;

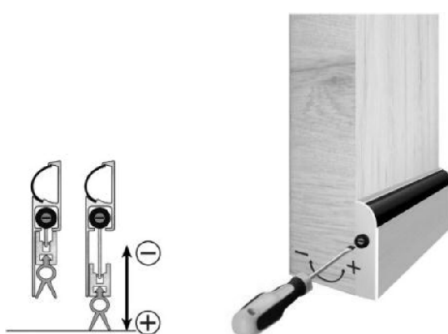

### Step 5:

- Using a screwdriver, secure the plunger, adjusting to ensure the profile fits the gap between the door and the floor when pressed.