



TRIPLO W
Criamos Segurança!

Installation Guide
Data Sheet

TW – GATE

Gateway for Remote Connection
of TTLock equipments via Wi-Fi



WARNING:


Please read the manual carefully before installation and keep it for future use.

iOS




www.triplow.pt

Dimensions

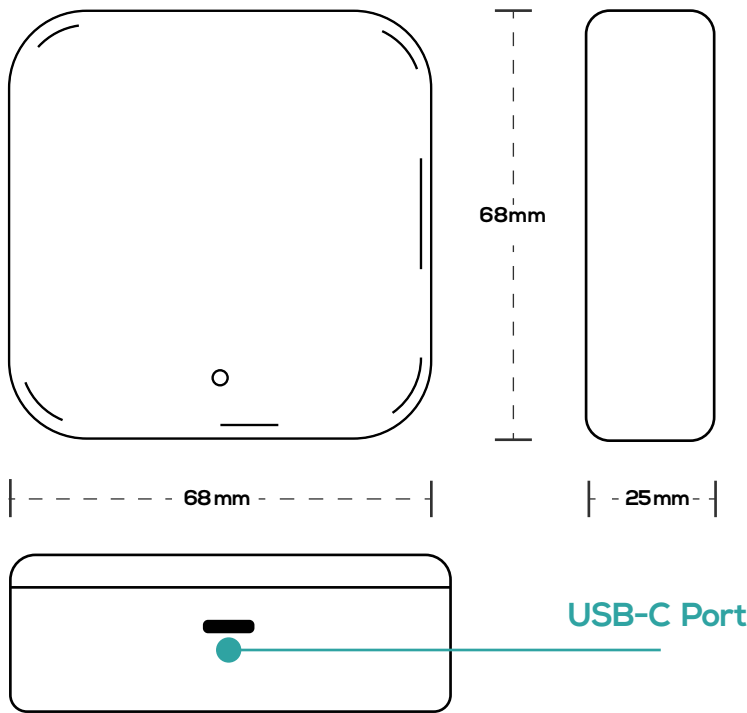

How TTLock Works

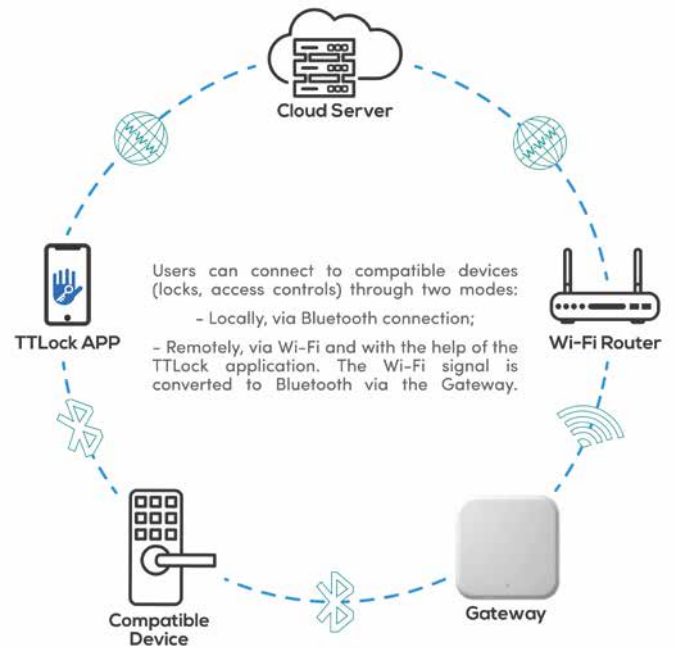




Data Sheets

MODEL	TW-GATE
MATERIAL	Plastic
COLOR	White
DIMENSIONS (mm)	68 x 68 x 22 mm
CONNECTIVITY	Bluetooth / Wi-Fi Signal Conversion Protocol Wi-Fi 2.4G (802,11b/g/n)
POWER	DC 5V / 500mA via USB-C
REACH	Up to 20 meters, open field
ACCESSORIES	USB-A to USB-C Cable, Charger

LED Lights Indicators



-  **Flashing light from Blue to Red**
Stand-by mode, ready to pair
-  **Blue Light**
Working
-  **Red Light**
Network Error

Equipment Management using TTLock APP

TTLock App is an Android or iOS compatible APP, with a simple and intuitive design. In addition to providing entry records and information about the connected compatible devices (such as battery level), it also allows the management of credentials and other commands like:

- To generate codes of various types - permanent, temporary, single-use or cyclical;
- Registration of proximity cards, permanent or timed;
- To generate, manage, assign and send e-Keys - for access via mobile devices.



<https://triplow.pt/TTLOCK>




TW-GATE Configuration (TTLock)

3


Before starting, make sure that the Gateway is turned on and the mobile device to be used is connected to the Wi-Fi network where you want to configure / pair the Gateway. This operation should be performed after configuring other devices such as locks / keypads.

1

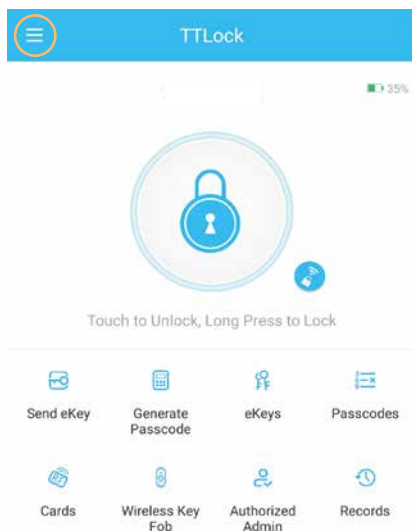


- Open TTLock APP;
- Select ☰ symbol (menu);

2

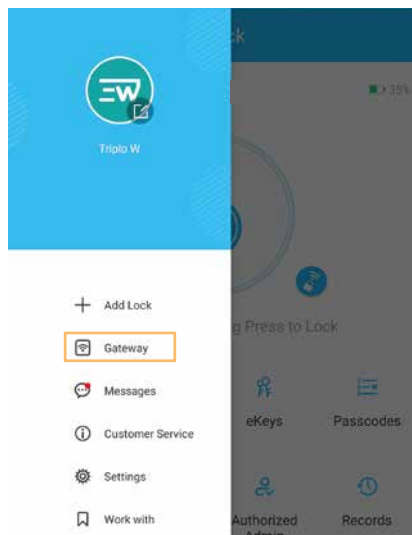

- Select **Gateway**;

3

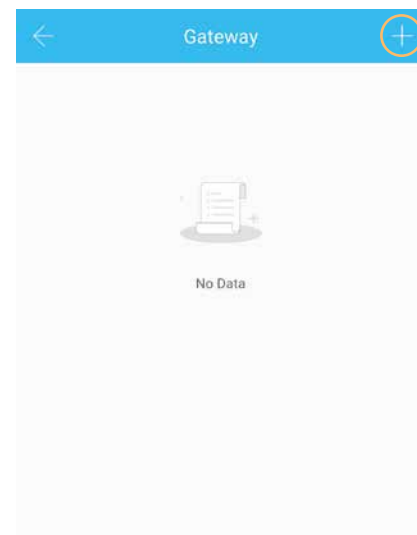

- Click + symbol, located in the upper left corner;

The following steps must be done within a maximum interval of 60 seconds otherwise the gateway will not be paired successfully and the process will have to be repeated.

4




- Select **G2 (Wi-Fi)** gateway;

5



- Connect the gateway to the closest power source and, when the LED light is flashing alternately, click "**Next**";


6

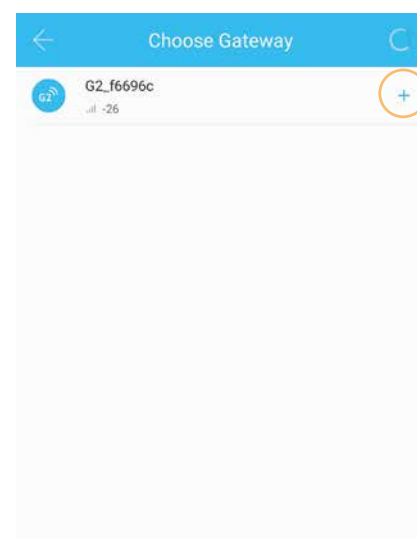

- Click on the + symbol, located in front of the connected gateway;


TW-GATE Configuration (TTLock)

7

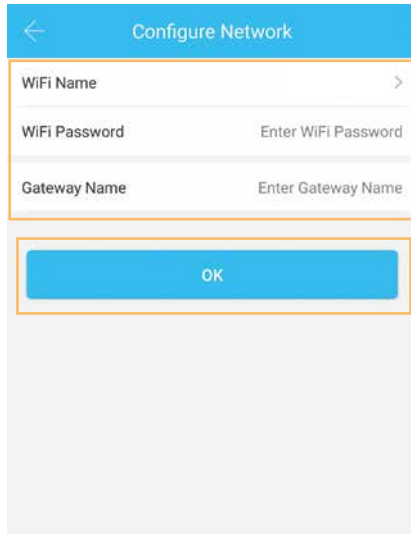


- Fill in the data to connect the gateway to the desired Wi-Fi network, making sure that the mobile device is connected to that same network. Data: Wi-Fi network name (select from list) and password of Wi-Fi network. Assign a name to the gateway and then press "OK";

8

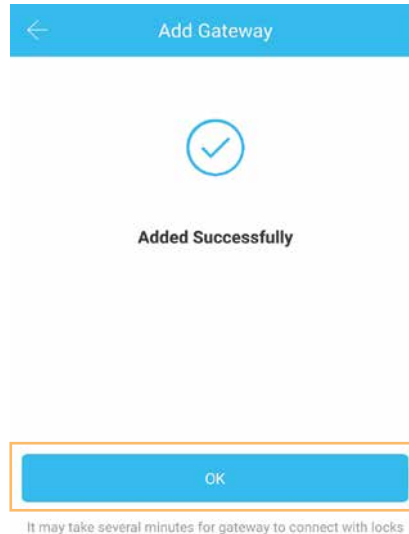


- The gateway will automatically start searching for nearby compatible devices when it is successfully connected/paired. These devices will appear on the APP and can be paired with the gateway at any time;

9

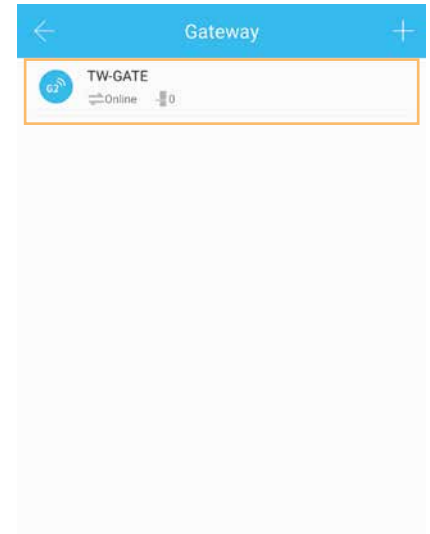

- You can check the status, view the connected devices and access settings by selecting "Gateway".

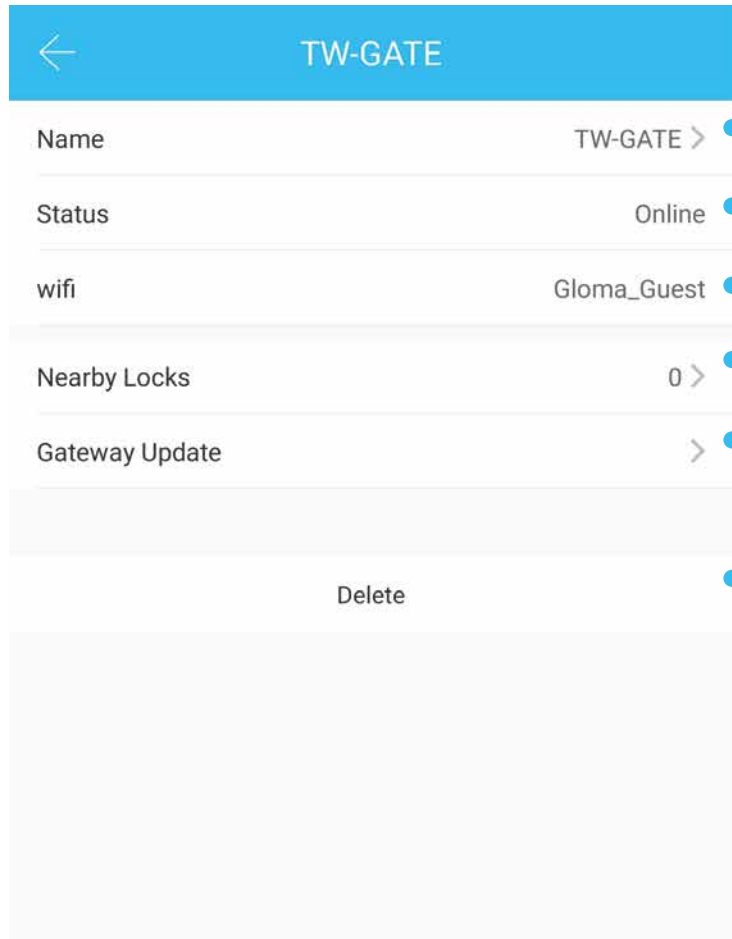

Gateway Settings

- NAME**
Change Gateway name
- STATUS**
Indicates Gateway connection state
- WI-FI**
Indicates to which network it is connected to
- NEARBY LOCKS**
Indicates the number of connected devices
- GATEWAY UPDATE**
Gateway Firmware Update
- DELETE**
Delete / Unpair Gateway

