



TECHNICAL SHEET


Locker lock with keypad, built-in application



TW108X

- Model: TW108X
- Operating mode: Private code (Standalone) from 1 to 15 digits
- Power: two 1.5V AAA alkaline batteries (not included);
- Battery life:
 - Low battery alarm – 3 beeps each time the door is opened
 - Opens door >10,000 times normally, continues to open 100 times after low battery alarm
- Wrong code alarm – if a wrong code is entered 4 times in a row
- Permitted working temperature: -20°C at 60°C.
- Size: 130 x 60 x 46 mm
- Material: Silver Zinc Alloy
- For doors 0.5mm – 5.0mm thick

Dimensions

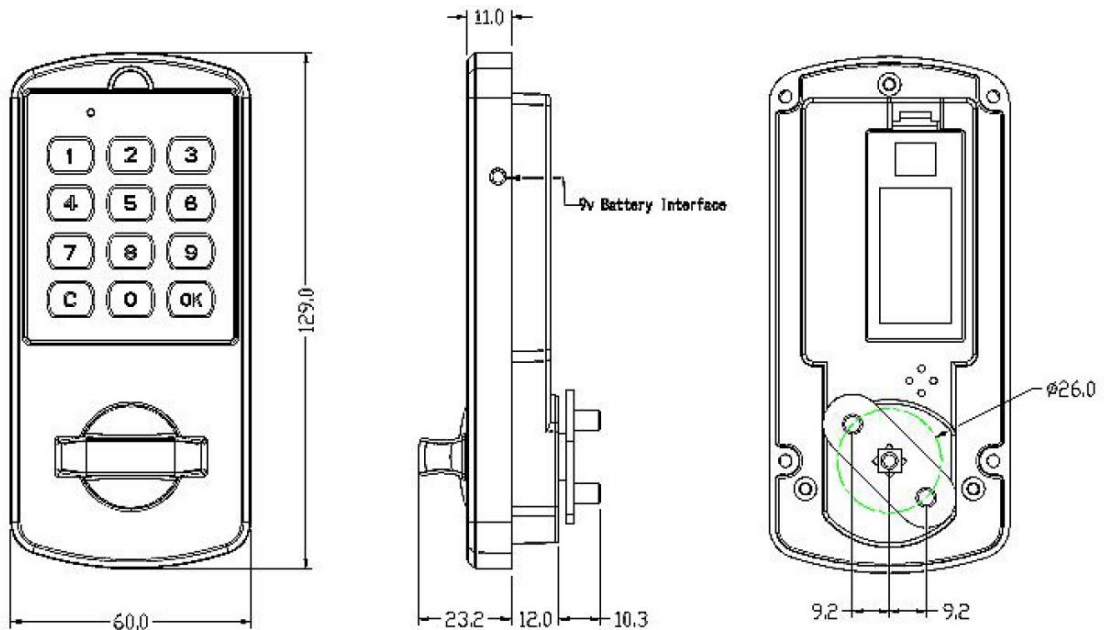



Configuration and Operating Mode

| | |
|--------------|--|
| Factory code | 0 + "Ok" |
| Modify code | <ol style="list-style-type: none">1. Old code + "C" – Fixed green LED2. "New Code" + "Ok" – Long beep <ul style="list-style-type: none">➤ Code changed successfully: Long Beep➤ 1 to 15 digit code |
| How to Open | Private Mode: Enter code + "Ok" (Green LED on and beep), turn and pull the locker/ cabinet door. |

Common problems and solutions

| Problem | Cause | Solution |
|--|----------------------------|---|
| Impossible to open without any keyboard response | Power failure; | Use 12V power supply to externally power the lock |
| The green LED always flashes and they are sound signals are emitted. | Wrong code multiple times; | Alarm state for 1 minute, after which the lock returns to its normal state. normal. |

